


# H.A. GUDEN CO., INC.

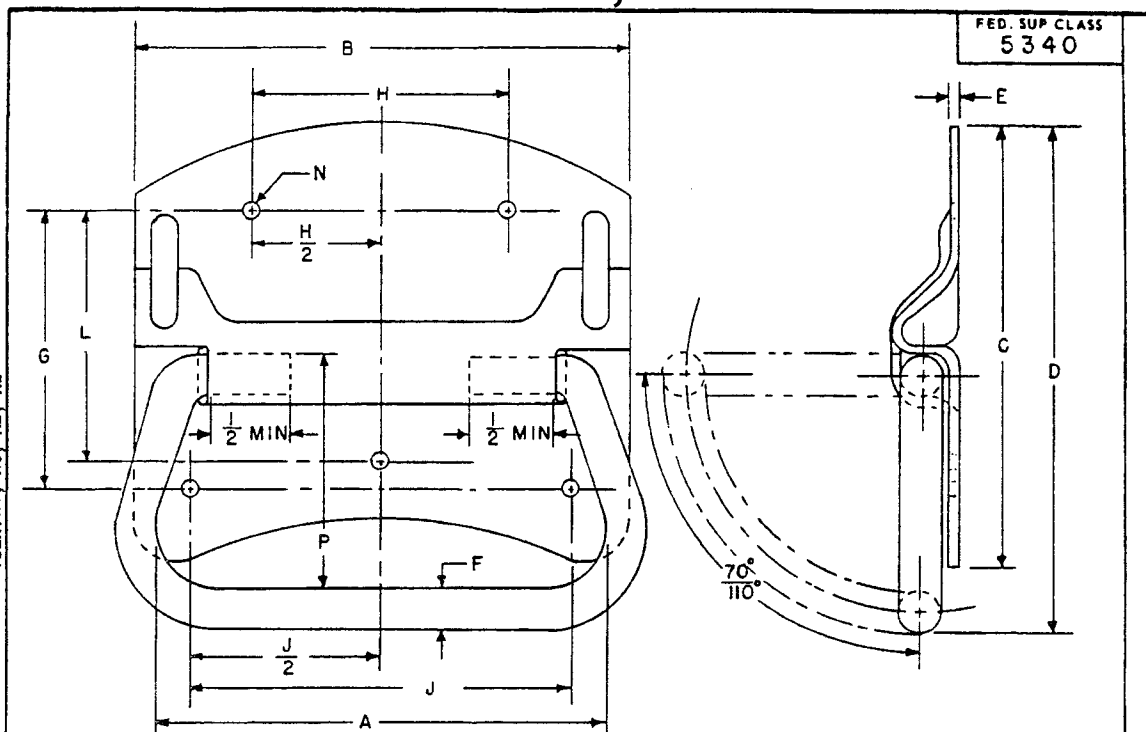

FED. SUP CLASS  
5340

REVIEWER: GL, IS  
USER: AV, MC, ME, MI

(B)

DASH NO.	A	B	C	D	E	F DIA	G	H	J	L	N DIA	P
1	±.06	±.06	±.06	±.06	±.01	±.03	±.03	±.03	±.03	±.03	±.005	MIN
	4.5	4.88	4.19	5.19	.08	.44	2.81	2.5	3.75	2.53	.155	2.25

NOTES:

- MATERIAL:** Mounting plate, cold rolled, temper No. 3 in accordance with QQ-S-698. Bail, steel annealed and cold finished in accordance with QQ-S-634.
- PROTECTIVE COATING:** Cadmium plate, Type II, Class 3 in accordance with QQ-P-416. Zinc plate, Type II, Class 3 in accordance with QQ-Z-325.
- DIMENSIONS:** All dimensions are in inches.
- For design feature purposes, this standard takes precedence over procurement documents referenced herein.
- Referenced documents shall be of the issue in effect on date of invitations for bid.
- The MS part number consists of the MS number, plus the dash number. Example: MS35793-1.
- The distance from the center of the mounting holes to the edge of the mounting plate shall be .375 minimum.
- The illustrations are for identification and are not intended to restrict designs or shapes not dimensioned.
- Dash numbers 21 and 22 are cancelled after 27 MAR 1970 and superseded by dash number 1.

(B)

**MATERIAL EXCEPTION SEE BELOW**

This military standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. WC Other Cust OS 82	TITLE HANDLE, BAIL-CHEST, SURFACE MOUNTING, PLAIN HOLES	MILITARY STANDARD MS 35793
PROCUREMENT SPECIFICATION None	SUPERSEDES:	SHEET 1 OF 1

APPROVED 15 OCT 1956 REVISED (A) 21 NOV 1967 (B) 27 MAR 1970

DD FORM 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

**MOUNTING PLATE: JIS G3141 SPCC-SD  
SIMILAR TO ASTM A1008  
BAIL: JIS G3505 SWRM6K  
SIMILAR TO AISI-SAE 1006**